

Installation Guide

ML 73 n 1 Standard & Disabled Series

COMBINATION PAPER TOWEL, HAND DRYER & WASTE RECEPTACLES

(Refer overleaf or to WEB site for all dimensions)

The below is provided as a guide only; proper building practices and PPE should always be applied.

Surface Mount

1. It is always good practice to draw an outline of the unit on the wall before drilling or fixing the unit in place to ensure that the unit position will maintain its functionality and does not foul or hinder the operation of any other fittings or fixtures, both on and within the wall.
2. Obtain the required height of the unit from the client or from architectural drawings.
3. Map the position of the unit onto the wall in the required and level position.
4. Mark the position of the multiple fixing holes in the back of the unit in the required position, ensuring that they are level. **NOTE: Electrical cable ingress is 1m from the base of the internal section (ML 73n1) or 850mm (ML73n1D) and centrally located (50mm x 35mm).** *Check Twice / Drill Once.* Drill holes and use the appropriate fixings for the wall; masonry anchors for brick or block work, hollow wall anchors for plaster or villa board.
5. Fix the unit to the wall but only use enough pressure to just hold the unit in place; using a level, check to ensure that the unit is in its correct position and the surface mount surround is positioned correctly, then tighten the fixings to hold the unit firmly in place.
6. ELECTRICAL CONNECTION OF HAND DRYER *(only to be carried out by a qualified electrician)*: Remove dryer section via retaining screws and draw electrical cable into dryer cavity.
7. Fit off electrical connection to terminal block/hand dryer and reinsert/secure dryer into housing. Power up and test.

Semi-Recessed


1. Draw an outline of the unit on the wall, ensuring that the unit will maintain its functionality and does not foul or hinder the operation of any other fittings or fixtures, particularly within the internal wall cavity where services may be located.
2. Inside of this outline, mark out the functional box section that will have to be cut from the wall allowing the unit to be recessed - allow approx 5mm on all sides for easy fitment of the unit. **NOTE: Electrical cable ingress is 1m from the base of the internal section (ML 73n1) or 850mm (ML73n1D) and centrally located (50mm x 35mm).** *Check Twice / Cut Once.*
3. Before cutting the hole, check to ensure that there are no services within the area to be cut.
4. Cut out and remove the wall section that allows the unit to become recessed.
5. It will be necessary to box out (noggins/studs) the cavity to allow for the secure fixing of the unit through the internal side fixing holes.
6. Pack out the cavity, ensuring that the packing will allow the unit to sit level and plumb. It is recommended that the unit not be fixed in a way that the securing screws are supporting the weight of the unit, but it is supported/sitting on the lower cavity boxing.
7. Remove dryer section via retaining screws and draw electrical cable into dryer cavity. Insert the unit into the wall cavity ensuring the semi-recessed surround is in the correct position.
8. Fix off the unit, ensuring that the unit is held firmly in place, Do Not over tighten the fixing screws as this may distort and affect the functionality of the unit.
9. ELECTRICAL CONNECTION OF HAND DRYER *(only to be carried out by a qualified electrician)*: Fit off electrical connection to terminal block/hand dryer and reinsert/secure into housing. Power up/test.

Recessed


As for the Semi-recessed unit, excluding all reference/activity re the surround.

These units should only be installed by a competent tradesperson and Metlam Australia takes no responsibility for any damage to walls or fixtures due to incorrect installation.

ML 73n1 - Standard Series

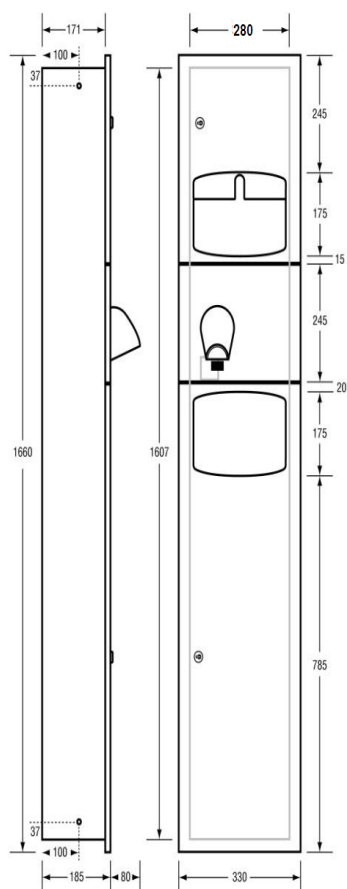

ML 73n1 – Disabled Series

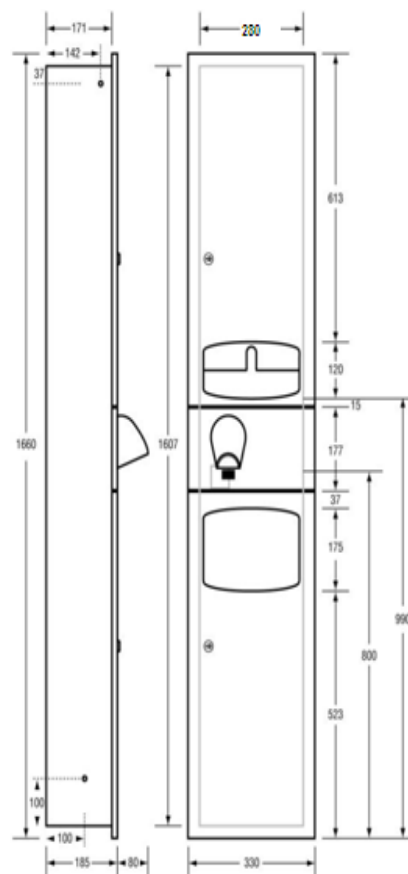

MATERIAL SPECIFICATION / FEATURES:

Body & Internals: #304 Grade Stainless Steel 1.5mm Body with Rolled Edges & Seamless, Welded & Polished Corners / Doors fitted with Full Length Piano Hinges and 2 Tumbler Locks (Keyed alike) / 26L (ML73n1) or 10L (ML73n1D) Internal SS Waste Bin **NOTE:** All Surface or Semi Recessed Mount Units Are Provided Pre-Assembled with Surround Fitted.

Dispenser Paper Capacity: 300 Interfold Paper Towels or 500 Interleaved Paper Towels

Hand Dryer: Auto Operation 2400W – 10Amp Maximum Power Usage / Infrared Sensor Operation (distance adjustable) / Thermal Safety Overload Protection for Motor and Heater Element / IPX 1 Rating / Sound Level 73db (+/-3) / Bright Chrome Nozzle (Adjustable if required) / 60 Second Safety Auto Power Shut Off.

WARRANTY: Standard 1 Year on All Stainless Steel Components and FIVE Year on Electric Hand Dryer

NOTE: General and regular maintenance to retain functionality, operational integrity and appearance of the unit is the responsibility of the property owner/janitorial staff.

These units should only be installed by a competent tradesperson and Metlam Australia takes no responsibility for any damage to walls or fixtures due to incorrect installation.

The photographs and line drawings of the products presented above are representational only. Metlam Australia Pty Ltd reserves the right to, and from time to time, make changes and improvements in design and dimensions.