




MATERIAL SPECIFICATION & INSTALLATION GUIDE

PRODUCT ITEM CODE & DESCRIPTION

ML 2122 ~ STAINLESS STEEL COLLAPSIBLE HOOK

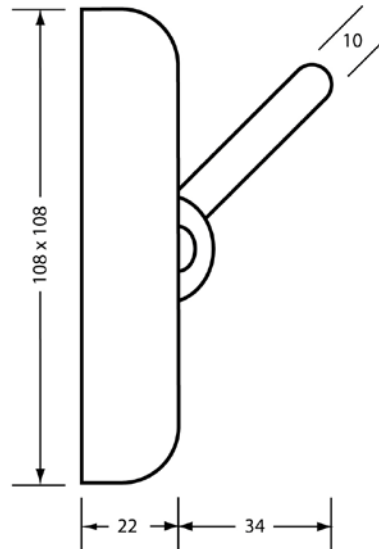

COMPONENT MATERIALS / FEATURES:

#304 Grade 12g Stainless Steel, Exposed Surfaces #4 (S) Finish / Suicide Resistant Spring Loaded Pivot Hook (10mm \varnothing) With 12kg Drop-down Load Capacity / Hook Internal Housing - 14g material / Concealed Fix Rear Mounting Using 4 off 50mm x 1/4" Metal Thread Security Hex Screws

DIMENSIONS:

Overall ~ 108mm W x 108mm H x 56mm D (Hook in upright position)

INSTALLATION:

1. May be subject to Australian Building Code Regulations for able bodied and/or Healthcare use as may be applicable; **MUST** be affixed to secondary mounted panel of minimum 200mmW x 140mmH x 12mmT eg. Compact laminate board or hardwood. Locate height & mark on wall. It is recommended that the unit is installed whereby it clears any other fixtures by at least 100mm
2. Locate and Drill holes (4 off 70mm C to C ~ 100mm X diagonal) into secondary mount panel and position metal security hex thread screws through panel and secure firmly into rear of hook body.
3. Then secure secondary panel onto wall surface with appropriate screws/wall-plugs
4. Test load hook for operational integrity

NOTE: Not recommended for use with materials exceeding a gross weight of 11kg

These units should only be installed by a competent tradesperson and Metlam Australia takes no responsibility for any damage to walls or fixtures due to incorrect installation.