


MATERIAL SPECIFICATION & INSTALLATION GUIDE

PRODUCT ITEM CODE & DESCRIPTION

ML 214 ~ STAINLESS STEEL DUAL ROBE/COAT HOOK

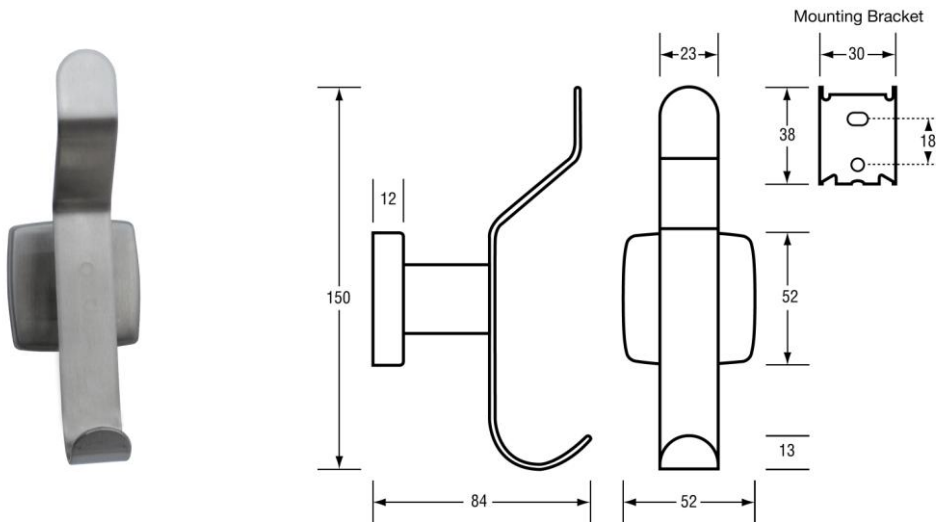

COMPONENT MATERIALS/SPECIFICATION:

#304 Grade Stainless Steel / Exposed Surfaces #3 (S) or #4 (B) Finish / Hook Welded To Flange (with locking set-screw) covering Mount Bracket (Concealed Wall Mount)

DIMENSIONS:

Overall ~ 52mm W x 150mm H x 84mm O/A D

INSTALLATION:

1. May be subject to Australian Building Code Regulations for able bodied and/or disabled use as may be applicable. It is recommended that any individual unit is installed whereby it clears any other fixtures by at least 150mm and not carry loads any greater than 15kg
2. Loosen grub screw on underside of Mounting Flange/Hook, remove Mounting Bracket and locate fixing height, levels & mark on wall. Drill mounting holes and install anchors/wall plugs
3. Place a small amount of silicone sealant to rear of mounting bracket, around the full perimeter, then loosely secure to wall/substrate surface with appropriate fasteners/screws.
4. Check level and firmly secure Mounting Bracket to wall/substrate. It is recommended to cover fastener/screw & bracket interface with a small amount of silicone to ensure fixing tension of fasteners/screws. Clean off excess silicone and leave to cure/set for at least 24 hours before use
5. Fit off unit by fitting Flange/Hook in place and firmly secure with set-screw. It is recommended to cover set-screw thread with a small amount of silicone or Locktite® to ensure fixing tension

These units should only be installed by a competent tradesperson and Metlam Australia takes no responsibility for any damage to walls or fixtures due to incorrect installation.