




MATERIAL SPECIFICATION & INSTALLATION GUIDE

PRODUCT ITEM CODE & DESCRIPTION

ML 216 Series ~ HD STAINLESS STEEL MULTI FUNCTION HOOK

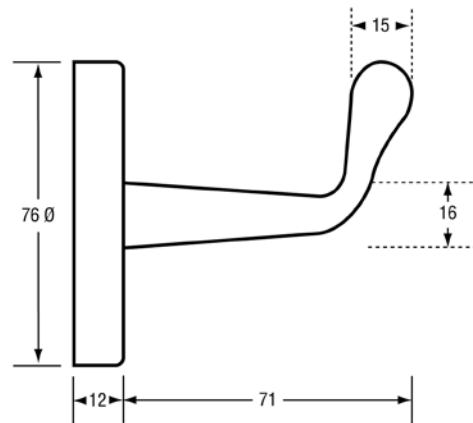

COMPONENT MATERIALS/SPECIFICATION:

#304 Grade Stainless Steel - Exposed Surfaces #3 (S) or #8 (B) Finish / Hook Welded To Mounting Bracket (Concealed Fix Wall Mount) with integrated Flange Cover (with locking set-screw)

DIMENSIONS:

Overall ~ 76mm W x 76mm H x 83mm O/A D

INSTALLATION:

1. May be subject to Australian Building Code Regulations for able bodied and/or disabled use as may be applicable. It is recommended that any individual unit is installed whereby it clears any other fixtures by at least 150mm and not carry loads any greater than 30kg, and is the responsibility of the installation contractor to ensure correct installation and appropriate fasteners /fixings are used.
2. Loosen grub screw on underside of Mounting Flange / Hook to expose Mounting Bracket, then locate fixing height, check levels & mark on wall. Drill mounting holes and install anchors/wall plugs
3. Place a small amount of silicone sealant to rear of mounting bracket, around the full perimeter, then loosely secure to wall/substrate surface with appropriate fasteners/screws.
4. Check level and firmly secure Mounting Bracket to wall/substrate. It is recommended to also cover fasteners/screws & bracket interface with a small amount of silicone to ensure fixing tension in-situ application. Clean off excess silicone and leave to cure/set for at least 24 hours before use
5. Fit off unit by fitting Flange in place and firmly secure with set-screw. It is recommended to cover set-screw thread with a small amount of silicone or Locktite® to ensure fixing tension and to aid in being tamper proof.

These units should only be installed by a competent tradesperson and Metlam Australia takes no responsibility for any damage to walls or fixtures due to incorrect installation.